

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курган (3522)50-90-47
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Ноябрьск (3496)41-32-12
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саранск (8342)22-96-24
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Улан-Удэ (3012)59-97-51
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

yuken@nt-rt.ru || https://yuken.nt-rt.ru

These are epoch-making solenoid operated valves of high pressure, high flow which have been developed incorporating a unique design concept into every part of the valve including the solenoid.

With wet type solenoids, these valves ensure the low noise and the long life, moreover, ensure no leakage of oil outside of the valves.

● Wide Range of Models

Choose the optimum valve to meet your need from a large selection available. The DSG-03 series solenoid operated directional valves are classified into the two basic models.

- Standard type Usable at high pressure: 31.5 MPa and high flow: 120 L/min.
- Shockless type A noise at spool changeover and a vibration in piping can be reduced to a minimum.

● Stable Operation


With a strong magnet and spring force, the valves are tough against contamination and thus ensure a stable operation.

● Usable in products of various standards


These standard valves are CE certified for installation in equipment overseas. UL/CSA certified products are also available. (UL/CSA certified products are special design products, so for details, please contact us.)

● Various Type of Connection


In addition to the current Terminal Box Type and Plug-in Connector Type, according usage you can select M12-4 Pin Connector Type suitable for serial transfer, Center Plug-in Connector Type to contribute shortening the wiring man-hour.

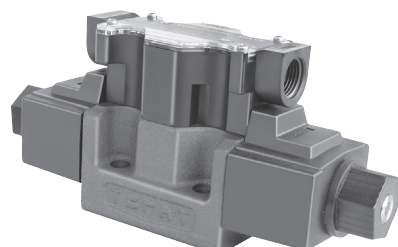

Terminal Box Type

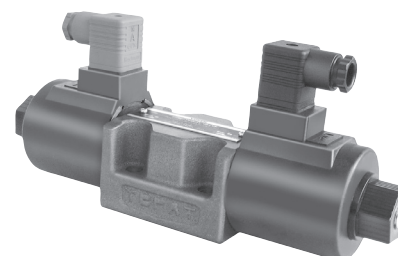

Plug-in Connector Type

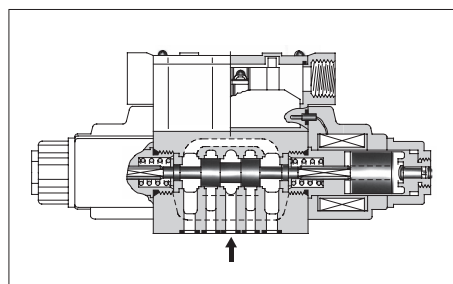

■ Specifications

Valve Type	Model Numbers	Max. Flow*2 L/min	Max. Operating Pressure MPa	Max. T-Line Back Pres. MPa	Max. Changeover Frequency min ⁻¹	Approx. Mass kg	
						Type of Solenoid	
						AC	DC,R,RQ
Standard Type	DSG-03-3C * - * -50	120	31.5 (Spool Type 60 Only) 25	16	240 (R Type Sol. Only) 120	3.6	5
	DSG-03-2D2- * -50					2.9	3.6
	DSG-03-2B * - * -50					—	5
Shockless Type	S-DSG-03-3C * - * -50	120	25	16	120	—	3.6
	S-DSG-03-2B2- * -50					—	3.6
Low Wattage (14W) *1	L-DSG-03-3C * - * -50	60	16	16	240 (R Type Sol. Only) 120	3.6	4.8
	L-DSG-03-2D2- * -50					2.9	3.5
	L-DSG-03-2B * - * -50					2.9	3.5

*1. For details of L-DSG-03, please contact us.

*2. The maximum flow means the limited flow without inducing any abnormality to the operation (changeover) of the valve.

The maximum flow differs according to the spool type and operating conditions. For details, please refer to the "List of Standard Models" on pages E-40 to E-42.

■ Sub-plates

Sub-plate Model Numbers	Thread Size Rc	Approx. Mass kg
DSGM-03-40	3/8	3
DSGM-03X-40	1/2	
DSGM-03Y-40	3/4	4.7

- Sub-plates are available. Specify the sub-plate model number from the table above. When sub-plates are not used, the mounting surface should have a good machined finish. (1.6/)

Solenoid Ratings

Valve Type	Electric Source	Coil Type	Frequency (Hz)	Voltage (V)		Current & Power at Rated Voltage			
				Source Rating	Serviceable Range	Inrush* ² (A)	Holding (A)	Power (W)	
Standard Type	AC * ¹	A 100	50	100	80 - 110	5.37	0.90	—	
			60	100	90 - 120	4.57	0.63		
				110		5.03	0.77		
		A 120* ³	50	120	96 - 132	4.48	0.75		
			60		108 - 144	3.81	0.52		
		A 200	50	200	160 - 220	2.69	0.45		
			60		200	180 - 240	2.29		0.31
					220		2.52		0.38
		A 240* ³	50	240	192 - 264	2.24	0.37		
			60		216 - 288	1.91	0.26		
Shockless Type	DC (K Series)	D 12* ³	—	12	10.8 - 13.2	—	3.16	38	
		D 24* ³		24	21.6 - 26.4		1.57		
		D 100		100	90 - 110		0.38		
	AC→DC Rectified	R 100	50/60	100	90 - 110	—	0.43	38	
		R 200		200	180 - 220		0.21		
	AC→DC Rectified (Quick Return)	RQ100	50/60	100	90 - 110	—	0.43	38	

★1. AC solenoid

AC solenoid (A*) is not available in shockless type. AC→DC rectified type solenoid (R*) or AC→DC rectified (quick return) type solenoid (RQ100) models are recommended for shockless operation with AC power.

★2. Inrush Current

Inrush current in the above table show rms values at maximum stroke.


★3. UL certified products are only available for the voltages above.

The coil type numbers in the shaded column are handled as optional extras. In case these coils are required to be chosen, please confirm the time of delivery with us before ordering.

Options


● Push Button with Lock Nut

Can be used for manual changeover of spool. The push button can be locked in the pressed condition.

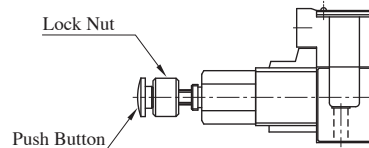


● Plug-in Connector Type

Electrical conduit connecting part is plug-in type, so can mount/dismount valves without disconnecting.

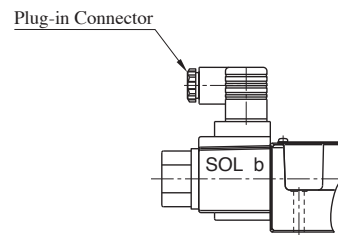

● Plug-in Connector with Solenoid Indicator Light

These are the indicator light incorporated plug-in connector type solenoids. Energisation or de-energisation of the solenoid can be easily identified with the incorporated indicator light.

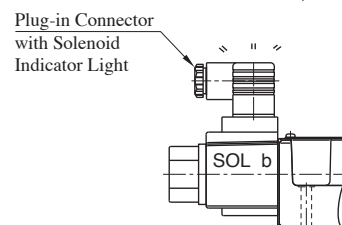

● M8 Mounting Bolts

As the mounting bolts, M6 socket head cap screws are used for the standard valves, however, M8 socket head cap screws are also available for supply as optional extras. In case the M8 screws are required, suffix "02" to the design number of both valve and sub-plate model number like below.

(Example) Valve : DSG-03-3C2-A100-5002

Sub-plate : DSGM-03-4002

The valve is supplied with 4 pcs. hexagon socket head cap screws M8 × 38 L.

Special connector type (M12-4 Pin Connector Type, Center Plug-in Connector Type, Center Plug-in M12-4 Connector Type), refer to pages E-51 & E-52.

Model Number Designation

S-	DSG	-03	-2	B	2	A	-D24	-C	-N ^{★5}	-50	-L
Shockless Type	Series Number	Valve Size	Number of Valve Positions	Spool Spring Arrangement	Spool Type	Input Only Valves Using Neutral Position & Side Position.	Coil Type	Manual Override	Electrical Conduit Connection	Design Number	Models with Reverse Mtg. of Solenoid
None: Standard Type	DSG: Solenoid Operated Directional Valve (Sub-plate Mounting Type)	03	3	C : Spring Centered	2, 3	—	AC : A100 A120 A200 A240	None: Manual Override Pin	None: Terminal Box Type	50	L : Input only for reverse mtg. of solenoid.
					4, 40						
			5 , 60								
			9, 10								
2	D : No-Spring Detented	2	—	DC : D12 D24 D100							
		B : Spring Offset			2 3 8	A : ^{★1} Using Neutral Position & SOL a Energised Position B : ^{★1} Using Neutral Position & SOL b Energised Position	R : (AC→DC) R100 R200 RQ : (AC→DC) RQ100	C : Push Button and Lock Nut (Option)	^{★2} N : Plug-in Connector Type (Option) ^{★3} N1 : Plug-in Connector Type with Indicator Light (Option)		
S : Shockless Type			3	C : Spring Centered	2 4	—	DC : D12 D24 D48				L : Input only for reverse mtg. of solenoid.
					B : Spring Offset						

★1. In case of Valves Using Neutral Position and Side Position, please refer to page E-43 for details.

★2. “N: Plug-in Connector Type” is not available for RQ-type (AC→DC) solenoids (coil type: RQ100).

★3. “N1: Plug-in Connector Type with Indicator Light” is not available for R type (AC→DC) solenoids (coil type: R*) and RQ-type (AC→DC) solenoids (coil type: RQ100).

★4. Models for phosphate ester fluid are available. When phosphate ester fluid is used, prefix “F-” to the model number because the special seals (fluororubber) are required to be used.























★5. Special connector types, “ M12-4 Pin Connector Type ”, “ Center Plug-in Connector Type ”, “ Center Plug-in M12-4 Connector Type ”, please refer to pages E-51 & E-52.

Attention

In the table above, the symbols or numbers highlighted with shade represent the optional extras. The valves with model number having such optional extras are handled as options, therefore, please confirm the time of delivery with us before ordering.

List of Standard Models


Models with AC Solenoids : DSG-03-***-A*

No. of Valve Positions	Spool-Spring Arrangement	Model Numbers	Graphic Symbols	Max. Flow L/min												
																
																
				Working Pressure MPa				Working Pressure MPa				Working Pressure MPa				
				10	16	25	31.5	10	16	25	31.5	10	16	25	31.5	
Three Positions	Spring Centered	DSG-03-3C2		100	100	100	100	100 (70)	100 (48)	96 (28)	65 (24)	100 (70)	100 (48)	96 (28)	65 (24)	
		DSG-03-3C3		90	90	90	90	100 (81)	100 (81)	100 (81)	100 (81)	100 (81)	100 (81)	100 (81)	100 (81)	
		DSG-03-3C4		80	80	80 (65)	80 (25)	100 (58)	100 (33)	76 (22)	46 (19)	100 (58)	100 (33)	76 (22)	46 (19)	
		DSG-03-3C40		100	100	100	100 (75)	100 (62)	100 (39)	84 (21)	48 (18)	100 (62)	100 (39)	84 (21)	48 (18)	
		DSG-03-3C5		30	30	30	30	26	21	18	16	30	28	28	28	
		DSG-03-3C60		70	70	70	—	100	100	100	—	100	100	100	—	
		DSG-03-3C9		100	100	100	100	60	60	60	60	60	60	60	60	
		DSG-03-3C10		80	80	80 (30)	80 (20)	100 (55)	100 (36)	60 (21)	34 (16)	100 (55)	100 (36)	60 (21)	34 (16)	
		DSG-03-3C11		100	100	100	100	100 (80)	100 (65)	85 (35)	62 (28)	100 (80)	100 (65)	85 (35)	62 (28)	
		DSG-03-3C12		90	90	90 (30)	90 (20)	100 (55)	100 (36)	60 (21)	34 (16)	100 (55)	100 (36)	60 (21)	34 (16)	
Two Positions	No-Spring Detented	DSG-03-2D2		100	100	100	100	40	40	30	28	60	60	40	35	
		Spring Offset	DSG-03-2B2		100	100	100	100	34	24	20	19	100 (62)	100 (62)	100 (44)	94 (37)
					100 (90)	100 (90)	100 (90)	100 (90)					80 (42)	73 (36)	63 (34)	51 (33)
					100	100	100	100					100 (79)	100 (72)	100 (64)	100 (59)
DSG-03-2B3		100 (75)	100 (75)	100 (75)	100 (75)	57	57	57	57	92 (55)	89 (46)	78 (28)	70 (27)			
DSG-03-2B8		—	—	—	—	26	19	18	16	100 (35)	87 (15)	61 (9)	49 (7)			
										45 (21)	34 (12)	15 (9)	11 (6)			

Notes) 1. The relation between the maximum flow in the table above and the frequency/voltage (within the serviceable voltage) is as shown below.

(Example)

The maximum flow rate is constant regardless of 50 Hz or 60 Hz and of any voltage variants within the serviceable voltage.


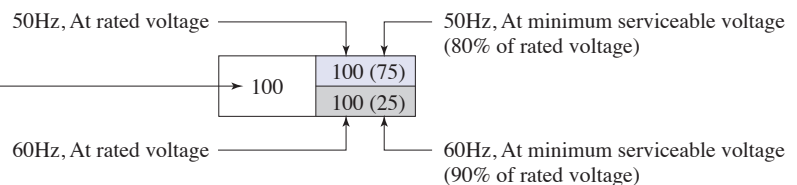




















2. For the maximum flow rate in P → T of the valves with a mark ★, please see page E-42.

The valve models with a ◆ mark are handled as options. If you choose such valves, check the time of delivery beforehand.

List of Standard Models


- Models with DC Solenoids : **DSG-03-***-D***
- Models with R Type Solenoids : **DSG-03-***-R***
- Models with RQ Type Solenoids : **DSG-03-***-RQ100**

No. of Valve Positions	Spool-Spring Arrangement	Model Numbers	Graphic Symbols	Max. Flow L/min												
																
																
				Working Pressure MPa				Working Pressure MPa				Working Pressure MPa				
10 16 25 31.5				10 16 25 31.5				10 16 25 31.5								
Three Positions	Spring Centered	DSG-03-3C2		120	120	120	120	120	120	80	55	120	120	80	55	
		DSG-03-3C3		120	120	120	120	120	120	120	120	120	120	120	120	
		DSG-03-3C4		120	120	120	120	120	120	84	64	120	120	84	64	
		DSG-03-3C40		120	120	120	120	120	120	65	53	120	120	65	53	
		DSG-03-3C5		50	50	50	50	35	24	21	20	45	45	45	45	
		DSG-03-3C60		120	120	120	—	120	120	120	—	120	120	120	—	
		DSG-03-3C9		120	120	120	120	100	100	100	100	100	100	100	100	
		DSG-03-3C10		120	120	120	65	120	112	60	51	120	112	60	51	
		DSG-03-3C11		120	120	120	50	100	69	46	40	100	69	46	40	
		DSG-03-3C12		120	120	120	50	120	80	65	62	100	80	65	62	
Two Positions	No-Spring Detented	DSG-03-2D2		120	120	120	120	45	37	30	28	60	60	40	35	
		Spring Offset	DSG-03-2B2		110	110	110	110	68	47	38	38	120	114	75	63
			DSG-03-2B3		120	120	120	120	77	77	77	77	120	83	58	48
			DSG-03-2B8		—	—	—	—	53	33	24	23	120	120	120	103

Notes) 1. The relation between the maximum flow in the table above and the voltage (within the serviceable voltage) is as shown below.

(Example)

The maximum flow rate is constant regardless of any voltage variants within the serviceable voltage.



At rated voltage [after temperature rise and saturated]


At minimum serviceable voltage (90% of rated voltage) [after temperature rise and saturated]

2. For the maximum flow rate in P → T of the valves with a ★ mark, please see page E-42.

The valve models with a ◆ mark are handled as options. If you choose such valves, check the time of delivery beforehand.

Maximum Flow Rate in P → T Flow

In valve type 3C3, 3C5, 3C60, in case where the actuator is put on between the cylinder ports A and B as illustrated below and where the actuator moves and suspended at its stroke end and where the valve is then shifted to the neutral position in the suspended state of the actuator, the maximum flow rates available are those as shown as the table below regardless of any voltage in the range of serviceable voltage.

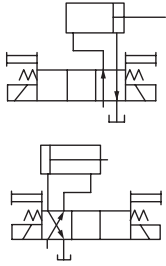

Model Numbers	Graphic Symbols	Max. Flow L/min			
		10 MPa	16 MPa	25 MPa	31.5 MPa
DSG-03-3C3-A *		100	100	100	100
DSG-03-3C3-D */R */RQ100		120	120	120	120
DSG-03-3C5-A *		26	21	18	16
DSG-03-3C5-D */R */RQ100		35	24	21	20
DSG-03-3C60-A *		84	52	52	—
DSG-03-3C60-D */R */RQ100		68	65	61	—

List of Standard Models (Shockless Type)


- Models with DC Solenoids : **S-DSG-03-****-D***
- Models with R Type Solenoids : **S-DSG-03-****-R***
- Models with RQ Type Solenoids : **S-DSG-03-****-RQ100**

No. of Valve Positions	Spool-Spring Arrangement	Model Numbers	Graphic Symbols	Max. Flow L/min											
								P → A [Port "B" Blocked]				P → B [Port "A" Blocked]			
				Working Pressure MPa				Working Pressure MPa				Working Pressure MPa			
				5	10	16	25	5	10	16	25	5	10	16	25
Three Positions	Spring Centered	S-DSG-03-3C2		120	120	120	120	120	120	75	50	120	120	75	50
		S-DSG-03-3C4		120	120	85	65	120	120	75	40	120	120	75	40
Two Positions	Spring Offset	S-DSG-03-2B2		120	100	75	40	39	39	39	39	120	120	105	60
														85	50

Note) 1. The relation between the maximum flow in the table above and the voltage (within the serviceable voltage) is as shown below.

(Example)



The maximum flow rate is constant regardless of any voltage variants within the serviceable voltage.

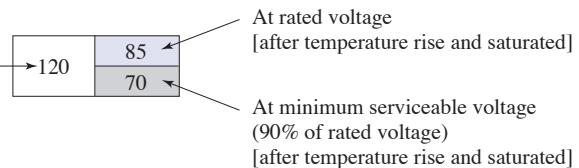



Reverse Mounting of Solenoid

In spring offset type, it is a standard configuration that the solenoid is mounted onto the valve in the SOL b position (side). However, in this particular spool-spring arrangement, the mounting of the solenoid onto the valve in the reverse position -SOL a side- is also available. The graphic symbol for this reverse mounting is as shown below.

As for the valve type 2B*A and 2B*B, please refer to the explanation under the heading of "Valves Using Neutral Position and Side Position" given below.

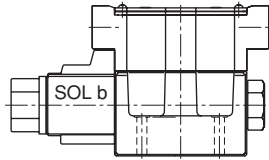

Standard Mtg. of Solenoid

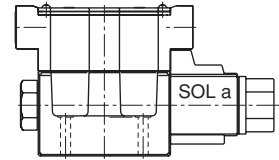


Reverse Mtg. of Solenoid

Valves Using Neutral Position and Side Position

Besides the use of the standard 2-position valves aforementioned in the "List of Standard Models", the 3-position valves also can be used as the 2-position valves using the two of their three positions. In this case, there are two kinds of the valve available. One is the valve using the neutral position and SOL a position (2B*A) and another is the valve using the neutral position and SOL b position (2B*B).

(Example) In case of Spool Type "2"

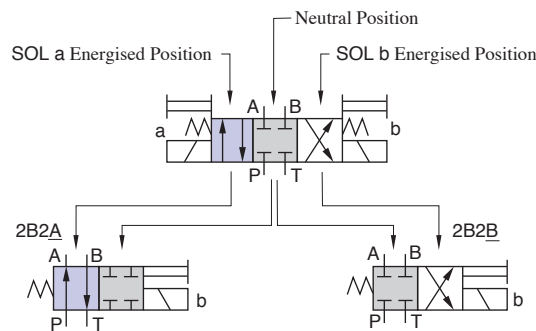

"A" Use of Neutral and SOL. a Energised Position

"B" Use of Neutral and SOL. b Energised Position

Model Numbers	Graphic Symbols	
	Standard Mtg. Type	Reverse Mtg. Type
(S-) DSG-03-2B *A		
(S-) DSG-03-2B2A		—

Model Numbers	Graphic Symbols	
	Standard Mtg. Type	Reverse Mtg. Type
*-DSG-03-2B *B		
(S-) DSG-03-2B2B		
DSG-03-2B3B		—
(S-) DSG-03-2B4B		—
DSG-03-2B60B		—
DSG-03-2B10B		—

In the above table, the graphic symbols in mounting type highlighted with shade are optional extra, therefore, please confirm the time of delivery with us before ordering.


■ Typical Changeover Time (Example)

● Standard Type (Without Shockless Function)

[Test Conditions]

Pressure : 16 MPa
 Flow Rate : 70 L/min
 Viscosity : 30 mm²/s
 Voltage : 100 %V at rated voltage
 (After temperature rise and saturated)


[Result of Measurement]

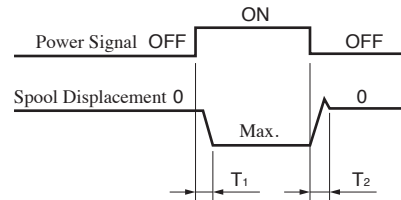

Type	Model Numbers	Time ms	
		T ₁	T ₂
Standard Type	DSG-03-3C2-A *	27	22
	DSG-03-3C2-D *	97	30
	DSG-03-3C2-R *	97	204
	DSG-03-3C2-RQ100	97	41


● Shockless Type

[Test Circuit and Conditions]

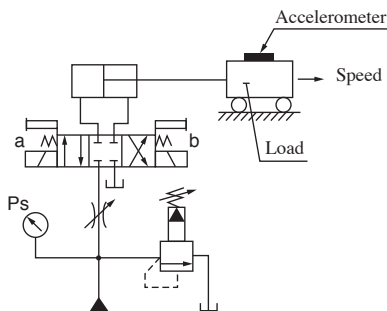

Setting Pressure (Ps) : 7 MPa
 Load (W) : 1000 kg
 Cylinder Speed : 8.8 m/min
 Viscosity : 30 mm²/s

[Result of Measurement]

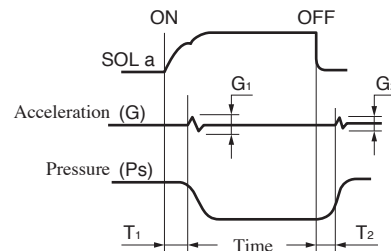

Type	Model Numbers	Time ms		Acceleration m/s ²	
		T ₁	T ₂	G ₁	G ₂
Shockless Type	S-DSG-03-3C2-D *	110	120	6.4	6.4
	S-DSG-03-3C2-R *	110	220		
	S-DSG-03-3C2-RQ100	110	120		

■ Mounting Bolts


Mounting bolts are not available, please order separately.

Type/Dimension/Quantity

Item	Details	
Type	Soc. Hd. Cap Screw (SCM)	
Thread Size d	M6	
Thread Pitch P	mm	1
Bolt Length L	mm	35
Thread Length (Reference) b	mm	24
Quantity	4	

Specifications/Machinery Characteristics

Item	Details
Material	Steel SCM
Screw Type	Meter Coarse Screw
Finishing	Black Oxide Film
Class of Strength	12.9
Standard	Based on JIS B 1176 (2014)

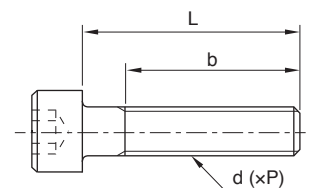

★If order to us, please use the model numbers below.


MBK-03-05- *

(* is the newest design number)

Pressure Drop


Pressure drop curves based on viscosity of 35 mm²/s and specific gravity of 0.850.

Standard Type : DSG-03

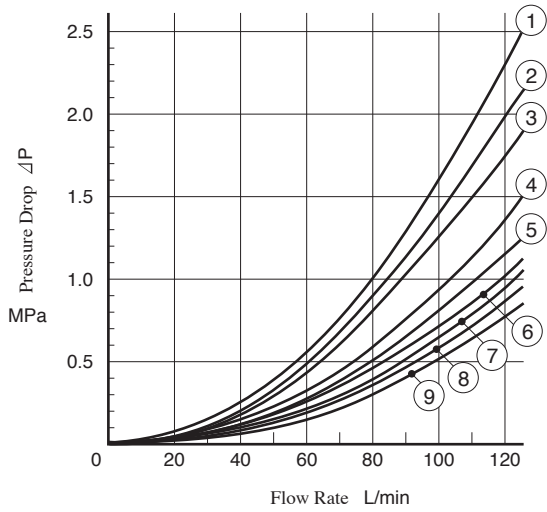

Model Numbers	Pressure Drop Curve Number				
	P→A	B→T	P→B	A→T	P→T
DSG-03-3C2	⑦	⑦	⑦	⑦	—
DSG-03-3C3	⑨	⑨	⑨	⑨	⑤
DSG-03-3C4	⑦	⑧	⑦	⑧	—
DSG-03-3C40	⑦	⑦	⑦	⑦	—
DSG-03-3C5	⑨	⑦	⑦	⑨	①
DSG-03-3C60	⑥	⑤	⑥	⑤	①
DSG-03-3C9	⑨	⑦	⑨	⑦	—
DSG-03-3C10	⑦	⑧	⑦	⑦	—
DSG-03-3C11	⑨	⑦	⑦	⑦	—
DSG-03-3C12	⑦	⑦	⑦	⑧	—
DSG-03-2D2	④	③	⑥	⑥	—
DSG-03-2B2	②	①	⑦	⑦	—
DSG-03-2B3	③	②	⑨	⑨	—
DSG-03-2B8	⑥	—	⑤	—	—

Shockless Type : S-DSG-03

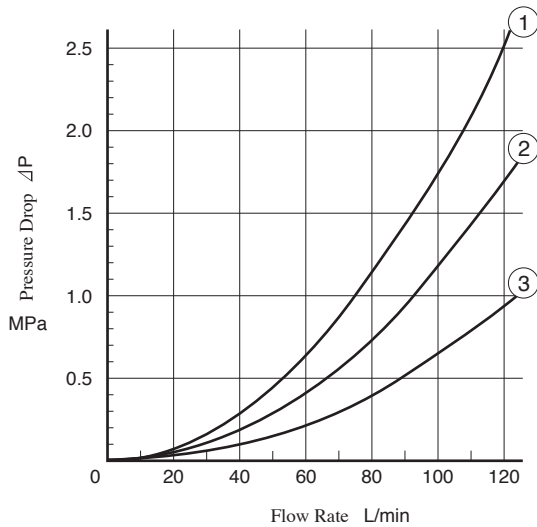

Model Numbers	Pressure Drop Curve Number			
	P→A	B→T	P→B	A→T
S-DSG-03-3C2	②	②	②	②
S-DSG-03-3C4	②	②	③	③
S-DSG-03-2B2	①	②	②	②

For any other viscosity, multiply the factors in the table below.

Viscosity mm ² /s	15	20	30	40	50	60	70	80	90	100
Factor	0.81	0.87	0.96	1.03	1.09	1.14	1.19	1.23	1.27	1.30




For any other specific gravity (G'), the pressure drop (ΔP) may be obtained from the formula below.

$$\Delta P' = \Delta P (G'/0.850)$$

Terminal Box Type (Standard)

■ Models with AC Solenoids : **DSG-03-***-A***


- Spring Centered
- No-Spring Detented

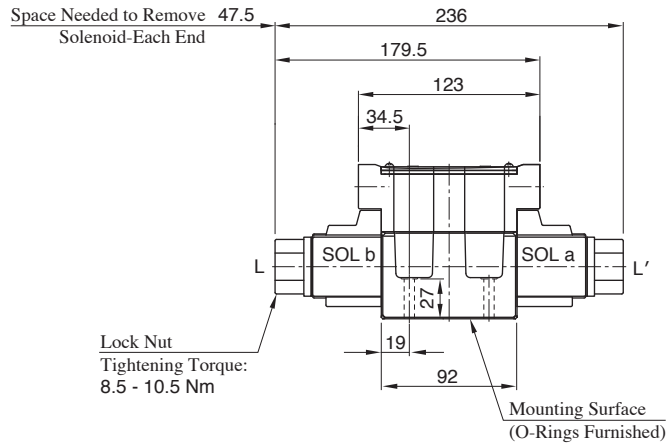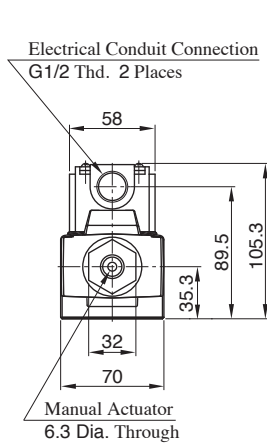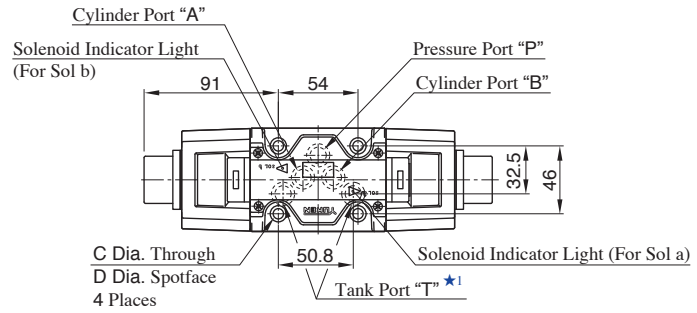

Model Numbers	C	D	Remarks
DSG-03-***-A*-50	7	11	Standard
DSG-03-***-A*-5002	8.8	14	Option


★1. Of the two of tank port "T", the tank port in the left side is normally used in our standard sub-plate, though, either side of the tank port "T" can be used without problem.

● Spring Offset

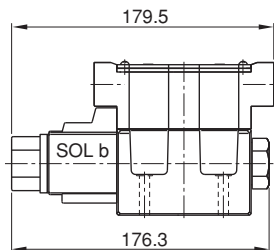


- For other dimensions, refer to the drawing above.
- Solenoid being mounted in the reverse position -SOL a side- is also available.

- Models with DC Solenoids : (S-) DSG-03-***-D*
- Models with R Type Solenoids : (S-) DSG-03-***-R*
- Models with RQ Type Solenoids : (S-) DSG-03-***-RQ100
- Spring Centered
- No-Spring Detented
- Spring Offset

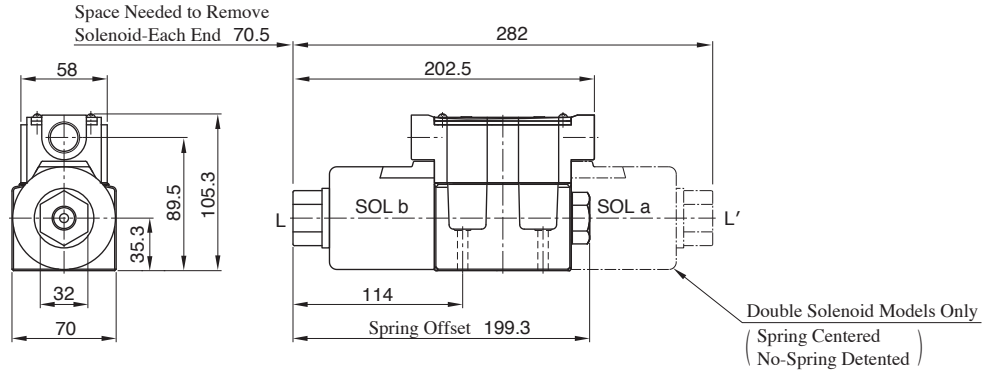

● For other dimensions, refer to Models with AC solenoids (Page E-46).

■ Sub-plates : DSGM-03/03X/03Y

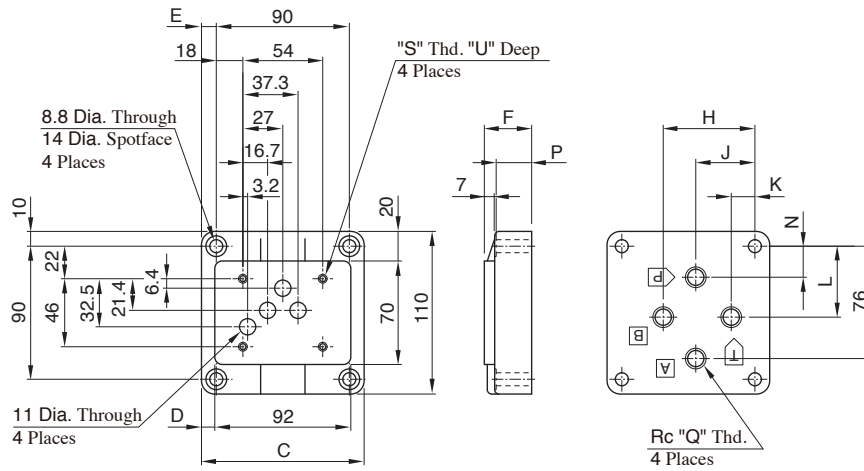

Sub-plate Model Numbers	C	D	E	F	H	J	K	L	N	P	Q
DSGM-03-40/4002	110	9	10	32	62	40	16	48	21	24	$\frac{3}{8}$
DSGM-03X-40/4002											$\frac{1}{2}$
DSGM-03Y-40/4002	120	14	15	50	80	45	10	47	16	42	$\frac{3}{4}$


Sub-plate Model Numbers	S	U	Remarks
DSGM-03*-40	M6	13	Standard
DSGM-03*-4002	M8	14	Option

Options

■ Plug-in Connector Type/Plug-in Connector with Indicator Light

● Models with AC Solenoids : **DSG-03-***-A*-N/N1**


The position of the Plug-in connector can be changed by loosening the lock nut ★. After completion of the change, be sure to tighten the lock nut with the torque as specified below.

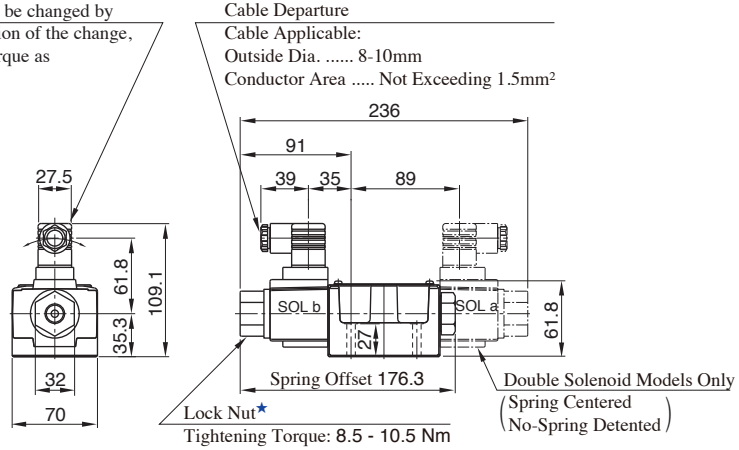

● Models with DC Solenoids : **(S-) DSG-03-***-D*-N/N1**

● Models with R Type Solenoids : **(S-) DSG-03-***-R*-N**

The position of the Plug-in connector can be changed by loosening the lock nut ★. After completion of the change, be sure to tighten the lock nut with the torque as specified below.

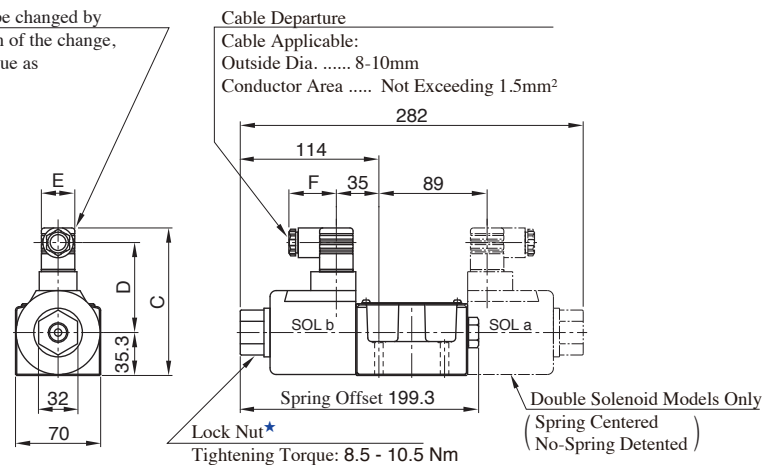

Model Numbers	C	D	E	F
DSG-03-***-D*-N/N1	121.1	73.8	27.5	39
DSG-03-***-R*-N	124.9	66.5	34	53


● For other dimensions, refer to "Terminal Box Type" (Page E-46 - E-47).

■ Models with Push Button & Lock Nut

(S-) DSG-03-*-*-C**


Lock Nut

Press the "Push Button" then turn "Lock Nut" clockwise. The position of the "Push Button" is held. Be sure to loosen "Lock Nut" fully before solenoid is energised.

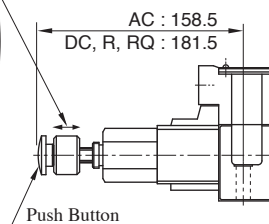

■ Electrical Conduit Connection

● Details of Receptacle

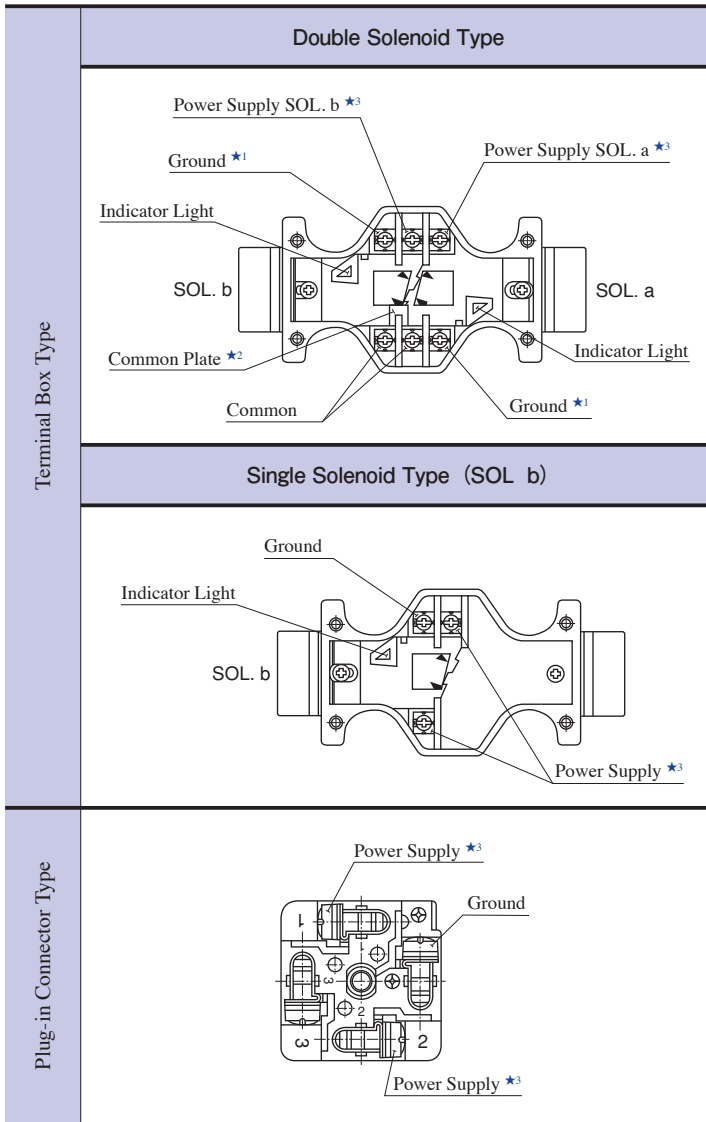


- ★1. There are two grounding terminals. You can use either one.
- ★2. If you do not need the common plate, remove it.
- ★3. With DC solenoids, polarity is no question.

⚠ DANGER


- Do not perform wiring while the power is on. Doing so may result in electric shock, burns or death.
- Make the wiring properly. Improper wiring will cause an irregular movement of the machine, resulting in a grave accident.

● Electrical Circuit (Single Solenoid Type)

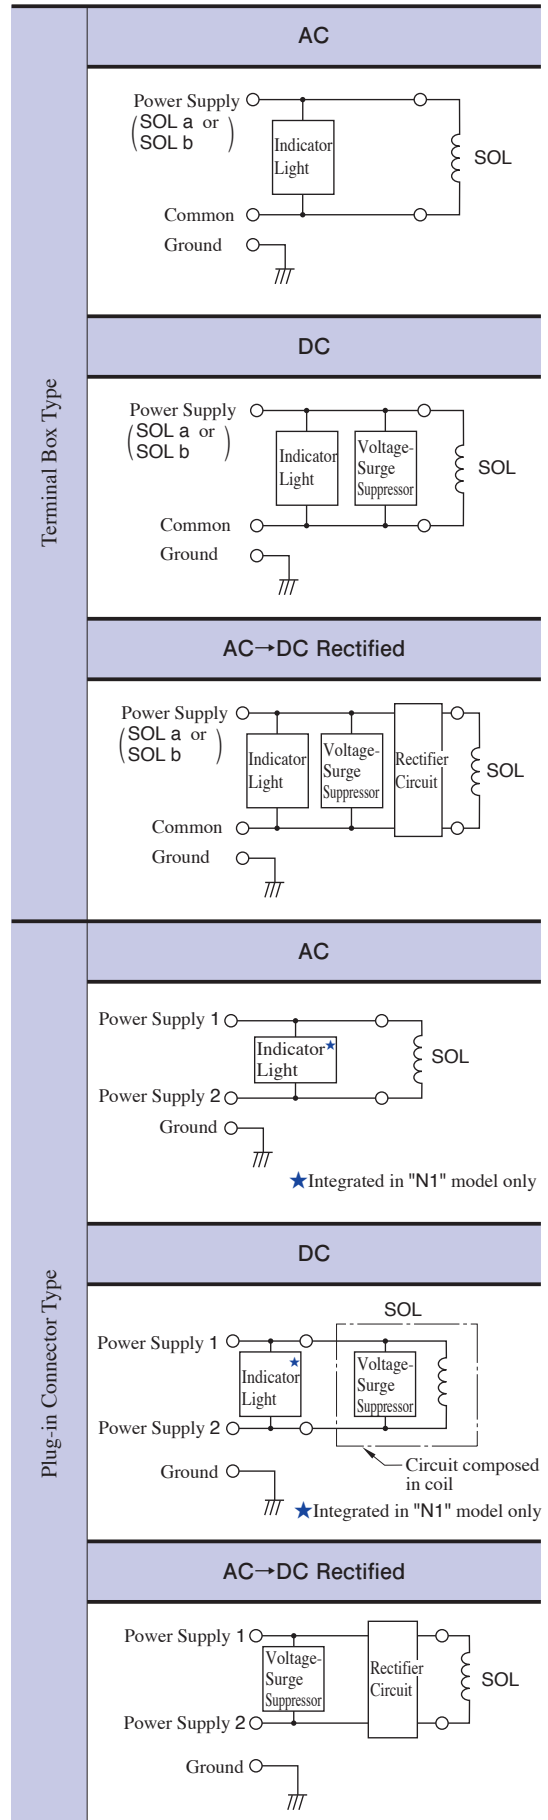

List of Seals and Solenoid Ass'y

(S-) DSG-03- * * *

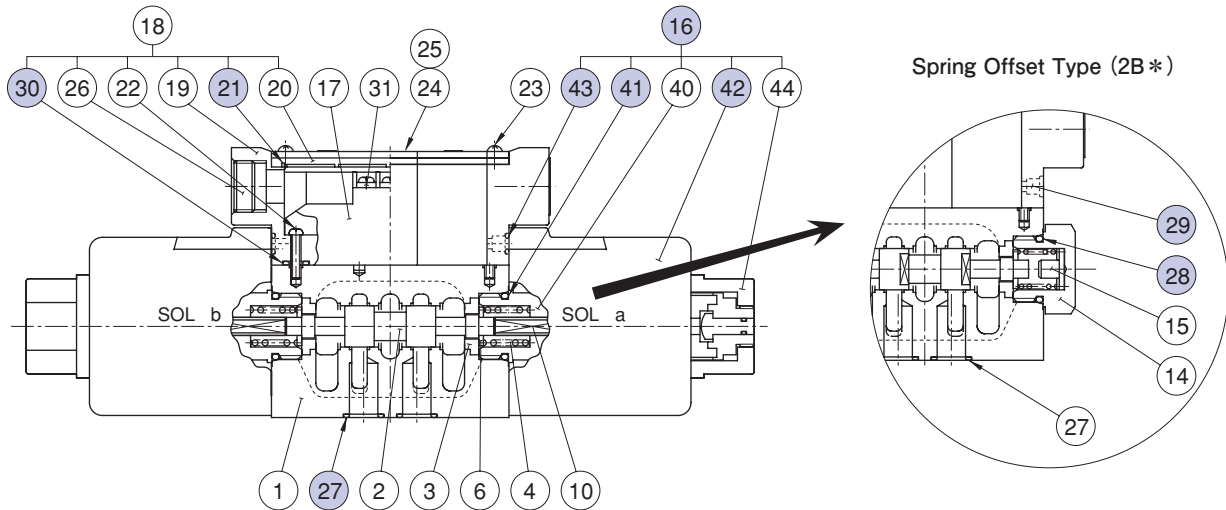

List of Seals

Item	Name of Parts	Part Numbers	Qty.			Remarks
			3C *	2D *	2B *	
21	Gasket	1751S-VK418689-6	1	1	1	
27	O-Ring	AS 568-014 (NBR-90)	5	5	5	
28	O-Ring	OR NBR-90 P21-N	—	—	1	
29	Plug	1790S-VK418329-9	—	—	2	
30	O-Ring	S 6	2	2	2	
41	O-Ring	OR NBR-90 P21-N	2	2	1	Included in Solenoid Ass'y ⑯
43	O-Ring	OR NBR-70-1 P4-N	4	4	2	

List of Solenoid Ass'y and Coil Ass'y

Model Numbers	⑯ Solenoid Ass'y No.	⑳ Coil No.	Remarks
DSG-03- * * *-A100	SA3-100-51	C-SA3-100-51	Terminal Box Type
DSG-03- * * *-A120	SA3-120-51	C-SA3-120-51	
DSG-03- * * *-A200	SA3-200-51	C-SA3-200-51	
DSG-03- * * *-A240	SA3-240-51	C-SA3-240-51	
DSG-03- * * *-D12	SD3-12-51	C-SD3-12-51	
DSG-03- * * *-D24	SD3-24-51	C-SD3-24-51	
DSG-03- * * *-D48	SD3-48-51	C-SD3-48-51	
DSG-03- * * *-R100/RQ100	SR3-100-51	C-SR3-100-51	Plug-in Connector Type
DSG-03- * * *-R200	SR3-200-51	C-SR3-200-51	
DSG-03- * * *-A100-N/N1	SA3-100-N-51	C-SA3-100-N-51	
DSG-03- * * *-A120-N/N1	SA3-120-N-51	C-SA3-120-N-51	
DSG-03- * * *-A200-N/N1	SA3-200-N-51	C-SA3-200-N-51	
DSG-03- * * *-A240-N/N1	SA3-240-N-51	C-SA3-240-N-51	
DSG-03- * * *-D12-N/N1	SD3-12-N-51	C-SD3-12-N-51	
DSG-03- * * *-D24-N/N1	SD3-24-N-51	C-SD3-24-N-51	
DSG-03- * * *-D48-N/N1	SD3-48-N-51	C-SD3-48-N-51	
DSG-03- * * *-R100-N	SR3-100-N-51	C-SR3-100-N-51	
DSG-03- * * *-R200-N	SR3-200-N-51	C-SR3-200-N-51	

As of solenoid Ass'y of shockless type and models with push button & lock nut, please order as below.

(Example) SD3-12-S-C-N-51


C : Only for the models with push button & lock nut (option)

S : Only for the models of shockless type

Coil Ass'y numbers are same with those in the above chart.

Special Electrical Conduit Connection

■ M12-4 Pin Connector Type

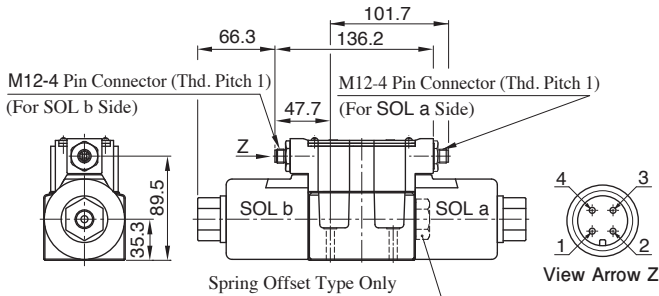


● For other dimensions, refer to page E-47 for Standard Terminal Box Type.

● Pin No.

Terminal	Double Solenoid Type		Single Solenoid Type (Standard Mounting)		Single Solenoid Type (Reverse Mounting)	
	Common Minus PNP (Source)	Common Plus NPN (Sink)	Common Minus PNP (Source)	Common Plus NPN (Sink)	Common Minus PNP (Source)	Common Plus NPN (Sink)
①	Unused	Common(+)	Unused	Common(+)	Unused	Common(+)
②	SOL a	SOL a	Unused	Unused	SOL a	SOL a
③	Common(-)	Unused	Common(-)	Unused	Common(-)	Unused
④	SOL b	SOL b	SOL b	SOL b	Unused	Unused
Connector/Expansion Direction	M1: SOL b Side M2: SOL a Side	M3: SOL b Side M4: SOL a Side	M1: SOL b Side M2: Plug Side	M3: SOL b Side M4: Plug Side	M1: Plug Side M2: SOL a Side	M3: Plug Side M4: SOL a Side

■ Center Plug-in Connector Type

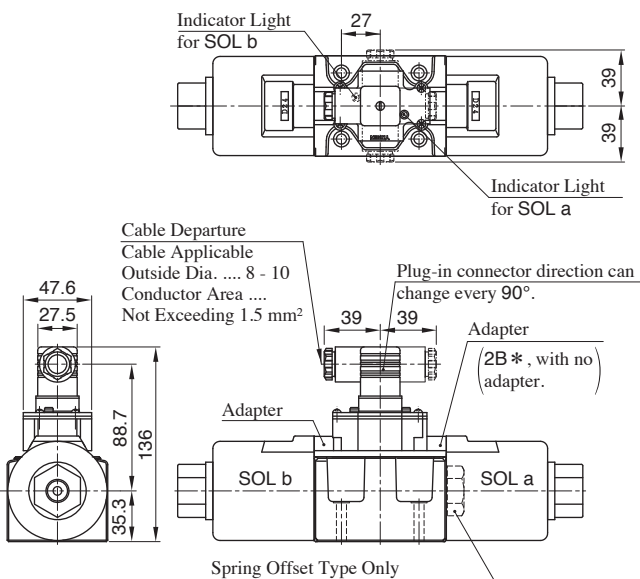

● For other dimensions, refer to page E-47 for Standard Terminal Box Type.

Model Numbers


DSG-03-2B2-D24-M1-50-L

- ↳ M12-4 Pin Connector Electrical Conduit Connection
 - M1 : Load Side Common Minus (PNP Type) Terminal Box SOL b Side Conduit Connection
 - M2 : Load Side Common Minus (PNP Type) Terminal Box SOL a Side Conduit Connection
 - M3 : Load Side Common Plus (NPN Type) Terminal Box SOL b Side Conduit Connection
 - M4 : Load Side Common Plus Terminal Box SOL a Side Conduit Connection

Coil numbers only for D12 and D24

● For other items, refer to page E-39 for Standard Model Number Designation.

■ Connection Circuit

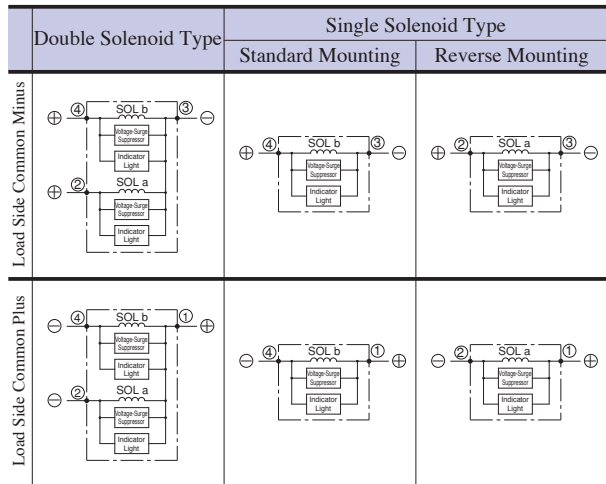

Model Numbers


DSG-03-2B2-D24-S-50-L

↳ Center Plug-in Connector Electrical Conduit Connection Type


Coil Numbers Only for D12, D24, A100, A120, A200 & A240

● For other items, refer to page E-39 for Standard Model Number Designation.

Details of Receptacle

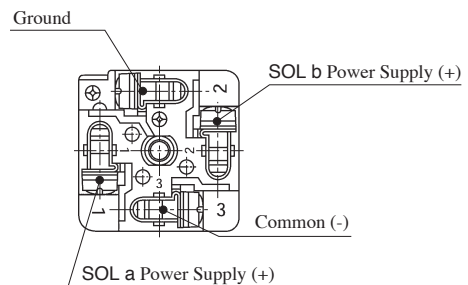

Center Plug-in Connector M12-4 Pin Connector Type

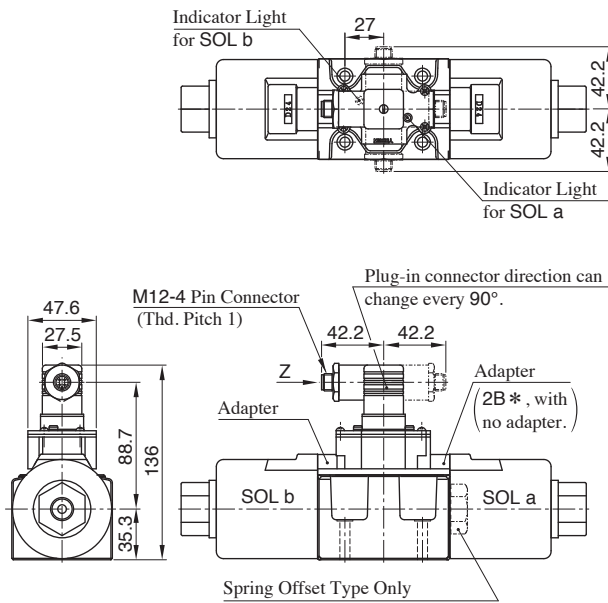

● For other dimensions, refer to page E-47 for Standard Terminal Box Type.

Pin No.

Terminal	Double Solenoid Type		Single Solenoid Type (Standard Mounting)		Single Solenoid Type (Reverse Mounting)	
	Common Minus PNP (Source)	Common Plus NPN (Sink)	Common Minus PNP (Source)	Common Plus NPN (Sink)	Common Minus PNP (Source)	Common Plus NPN (Sink)
①	Unused	Common(+)	Unused	Common(+)	Unused	Common(+)
②	SOL a	SOL a	Unused	Unused	SOL a	SOL a
③	Common(-)	Unused	Common(-)	Unused	Common(-)	Unused
④	SOL b	SOL b	SOL b	SOL b	Unused	Unused

Model Numbers

DSG-03-2B2-D24-S1-50-L


Center Plug-in M12 Connector 4 Pins Electrical Conduit Connection

S1 : Load Side Common Minus (PNP Type)


S2 : Load Side Common Plus (NPN Type)

Coil numbers only for D12 and D24

● For other items, refer to page E-39 for Standard Model Number Designation.



Connection Circuit

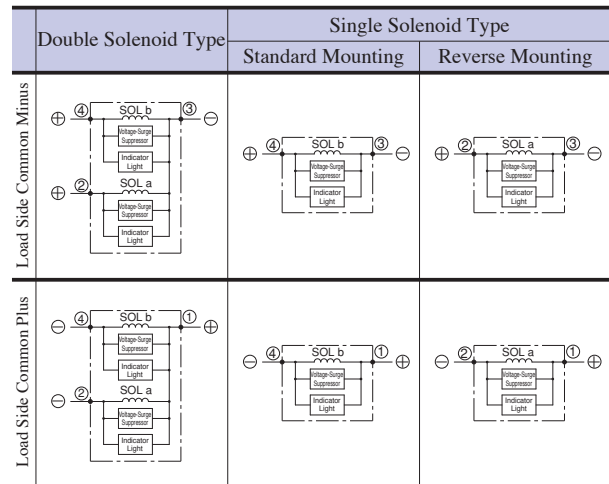

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курган (3522)50-90-47
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Ноябрьск (3496)41-32-12
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37

Ростов на Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саранск (8342)22-96-24
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Улан-Удэ (3012)59-97-51
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93